

Village of Villa Park  
20 South Ardmore Ave  
Villa Park, Illinois 60181  
630-834-8500  
publicworks@invillapark.com

**To: All Planholders** **From: Village of Villa Park**

**Re: Village of Villa Park – South Michigan Avenue Reconstruction**

**ADDENDUM 2**

**12/9/2016**

**MESSAGE**

**\*\*\*\*\*ALL PLANHOLDERS PLEASE NOTE\*\*\*\*\***

Upon receipt of this Addendum, please **sign the requested confirmation below regardless of whether you plan to bid or not** and EMAIL to:

***publicworks@invillapark.com***

RECEIVED DATE:
NAME:
TITLE:
COMPANY NAME:
SIGNATURE:

If you do not receive all of the pages indicated above, please call the above number. This facsimile contains privileged information intended for the use of the individual named above. If the reader of the facsimile is not the intended recipient or the employee responsible for delivering it, you are hereby notified that any dissemination or copying of this facsimile is strictly prohibited. If you have received this transmission in error, please notify us immediately by telephone and return the original to us at the address above. Thank you.

ADDENDUM NO. 2

DATE: December 9, 2016

FROM: Baxter & Woodman, Inc. Consulting Engineers

TO: Planholders of record for the Work titled

VILLAGE OF VILLA PARK, ILLINOIS  
SOUTH MICHIGAN AVENUE RECONSTRUCTION

The Bidding Documents are amended as follows:

1. SPECIAL PROVISIONS

- A. **Delete** the existing SCHEDULE OF PRICES sheet 4 (BLR 12220a - 5-4) from the CONTRACT DOCUMENTS and **insert** the attached page 4 of the SCHEDULE OF PRICES SHEET. This revision adds Sanitary Sewer Pipe 24".
- B. **Delete** the existing SIGNATURE SHEET (BLR 12200 – page 7) in its entirety from the CONTRACT DOCUMENTS and **insert** the attached SIGNATURE SHEET. This revision adds acknowledgement of Addendum No. 1 & 2.
- C. **Revise** the title for the existing Special Provision "ITEM #53-57 - SANITARY SEWER PIPE, PVC SDR 26 ASTM D-2241" to "ITEM #53-57 & 84 - SANITARY SEWER PIPE, PVC SDR 26 ASTM D-2241" this adds item number 84 to the title.

2. PLAN SET

- A. **Delete** the existing SCHEDULE OF QUANTITIES SHEET (sheet 5) from the PLAN SET and **insert** the attached sheet 4 of the SCHEDULE OF QUANTITIES. This revision adds item #84 Sanitary Sewer Pipe 24".
- B. **Delete** the existing DRAINAGE & UTILITIES SHEET (sheet 16) from the PLAN SET and **insert** the attached sheet 16. This revision adds item the diameter to the combined sewer to be removed and replaced.

Nothing in this Addendum shall be construed as changing other requirements of the Bidding Documents. Each Bidder shall acknowledge receipt of this Addendum where indicated in the Bid Form.

Bidder's Proposal for making Entire Improvements

Item No.	Items	Unit	Quantity	Unit Price	Total
63	THERMOPLASTIC PAVEMENT MARKING - LINE 6"	FOOT	105		
64	THERMOPLASTIC PAVEMENT MARKING - LINE 24"	FOOT	66		
65	HOT-MIX ASPHALT DRIVEWAY PAVEMENT, 4"	SQ YD	896		
66	CONSTRUCTION LAYOUT	L SUM	1		
67	DUST CONTROL WATERING	UNIT	43		
68	STORM SEWER (WATER MAIN QUALITY) 12 INCH	FOOT	493		
69	STORM SEWER (WATER MAIN QUALITY) 18 INCH	FOOT	62		
70	STORM SEWER (WATER MAIN REQUIREMENTS) EQUIVALENT ROUND-SIZE 36 INCH	FOOT	53		
71	REMOVE AND REINSTALL BRICK PAVER	SQ FT	50		
72	EXPLORATION TRENCH, SPECIAL	FOOT	200		
73	TEMPORARY ACCESS (PRIVATE ENTRANCE)	EACH	74		
74	TEMPORARY ACCESS (ROAD)	EACH	7		
75	SANITARY MANHOLES TO BE ADJUSTED	EACH	3		
76	TRAFFIC CONTROL AND PROTECTION, (SPECIAL)	L SUM	1		
77	PRE-CONSTRUCTION VIDEO RECORDING	L SUM	1		
78	PVC PIPE DRAINS SDR 26 ASTM D-2241, 6"	FOOT	150		
79	LIMESTONE SCREENINGS FA-5, 2"	SQ YD	275		
80	MANHOLE RESTRICTOR	EACH	1		
81	WATER USAGE DEDUCTION	TGAL	100	-\$8.85	-\$885.00
82	WATER USAGE CREDIT	TGAL	100	\$8.85	\$885.00
83	CONTINGENCY ALLOWANCE	DOLLAR	30,000	\$1.00	\$30,000.00
84	SANITARY SEWER PIPE, PVC SDR 26 ASTM D-2241, 24"	FOOT	10		

**RETURN WITH BID**

**SIGNATURES**

County DuPage  
Local Public Agency Village of Villa Park  
Section Number N/A  
Route South Michigan Avenue

(If an individual)

Signature of Bidder \_\_\_\_\_

Business Address \_\_\_\_\_  
\_\_\_\_\_

(If a partnership)

Firm Name \_\_\_\_\_

Signed By \_\_\_\_\_

Business Address \_\_\_\_\_  
\_\_\_\_\_

Inset Names and Addressed of All Partners



\_\_\_\_\_  
\_\_\_\_\_  
\_\_\_\_\_  
\_\_\_\_\_

(If a corporation)

Corporate Name \_\_\_\_\_

Signed By \_\_\_\_\_

President

Business Address \_\_\_\_\_  
\_\_\_\_\_

Inset Names of Officers



President \_\_\_\_\_

Secretary \_\_\_\_\_

Treasurer \_\_\_\_\_

Attest: \_\_\_\_\_  
Secretary

**BIDDER ACKNOWLEDGES RECEIPT OF ADDENDUM 1 & 2**  
DATE RECEIVED: \_\_\_\_\_  
BY: \_\_\_\_\_

**SUMMARY OF QUANTITIES**

NUMBER	PAY ITEM	UNIT	TOTAL QUANTITY	ROADWAY	SANITARY	WATER	SEWER SEPARATION
61	NON-SPECIAL WASTE DISPOSAL	CU YD	150	150			
62	SOIL DISPOSAL ANALYSIS	EACH	1	1			
* 63	THERMOPLASTIC PAVEMENT MARKING - LINE 6"	FOOT	105	105			
* 64	THERMOPLASTIC PAVEMENT MARKING - LINE 24"	FOOT	66	66			
# 65	HOT-MIX ASPHALT DRIVEWAY PAVEMENT, 4"	SQ YD	896	896			
66	CONSTRUCTION LAYOUT	L SUM	1	1			
# 67	DUST CONTROL WATERING	UNIT	43	43			
# 68	STORM SEWER (WATER MAIN QUALITY) 12 INCH	FOOT	493				493
# 69	STORM SEWER (WATER MAIN QUALITY) 18 INCH	FOOT	62				62
# 70	STORM SEWER (WATER MAIN REQUIREMENTS) EQUIVALENT ROUND-SIZE 36 INCH	FOOT	53				53
# 71	REMOVE AND REINSTALL BRICK PAVER	SQ FT	50	50			
# 72	EXPLORATION TRENCH, SPECIAL	FOOT	200	200			
# 73	TEMPORARY ACCESS (PRIVATE ENTRANCE)	EACH	74	74			
# 74	TEMPORARY ACCESS (ROAD)	EACH	7	7			
# 75	SANITARY MANHOLES TO BE ADJUSTED	EACH	3	3			

\* SPECIALTY ITEM  
# SPECIAL PROVISION

NUMBER	PAY ITEM	UNIT	TOTAL QUANTITY	ROADWAY	SANITARY	WATER	SEWER SEPARATION
# 76	TRAFFIC CONTROL AND PROTECTION, (SPECIAL)	L SUM	1	1			
# 77	PRE-CONSTRUCTION VIDEO RECORDING	L SUM	1	1			
# 78	PVC PIPE DRAINS SDR 26 ASTM D-2241, 6"	FOOT	150				150
79	LIMESTONE SCREENINGS FA-5, 2"	SQ YD	275	275			
80	MANHOLE RESTRICTOR	EACH	1				1
# 81	WATER USAGE DEDUCTION	TGAL	100	100			
# 82	WATER USAGE CREDIT	TGAL	100	100			
# 83	CONTINGENCY ALLOWANCE	DOLLAR	30,000	15,000		10,000	5,000
# 84	SANITARY SEWER PIPE, PVC SDR 26 ASTM D-2241, 24"	FOOT	10		10		

\* SPECIALTY ITEM  
# SPECIAL PROVISION

COPYRIGHT © 2016 BY BAYTER & WOODMAN, INC.  
 STATE OF ILLINOIS - PROFESSIONAL DESIGN FIRM  
 LICENSE NO. - 184-00123 - EXPIRES 4/30/2017  
 12/9/2016 9:55:20 AM  
 I:\Crs\TallLake\WLPK\13101-South Michigan Ave\cadd\Drawings\13101SHT-S00.dgn

DESIGNED - TMS	REVISED - 04-07-16
DRAWN - MAC	REVISED - ADDENDUM 1 12-5-16
CHECKED - JJF	REVISED - ADDENDUM 2 12-9-16
DATE - 10-18-16	FILE - 13101SHT-S00.dgn

**VILLAGE OF VILLA PARK, ILLINOIS  
SOUTH MICHIGAN AVENUE**

**SUMMARY OF QUANTITIES**

SCALE: NONE

STA. TO STA.


F.A. RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
N/A	N/A		39	5
FED. ROAD DIST. NO. 1 ILLINOIS FED. AID PROJECT			CONTRACT NO.	

W. MADISON ST.



REMOVE AND REPLACE  
10 LF OF 24" COMBINED  
SEWER

CL S. MICHIGAN AVENUE STA 9+91  
CL W. MADISON STREET

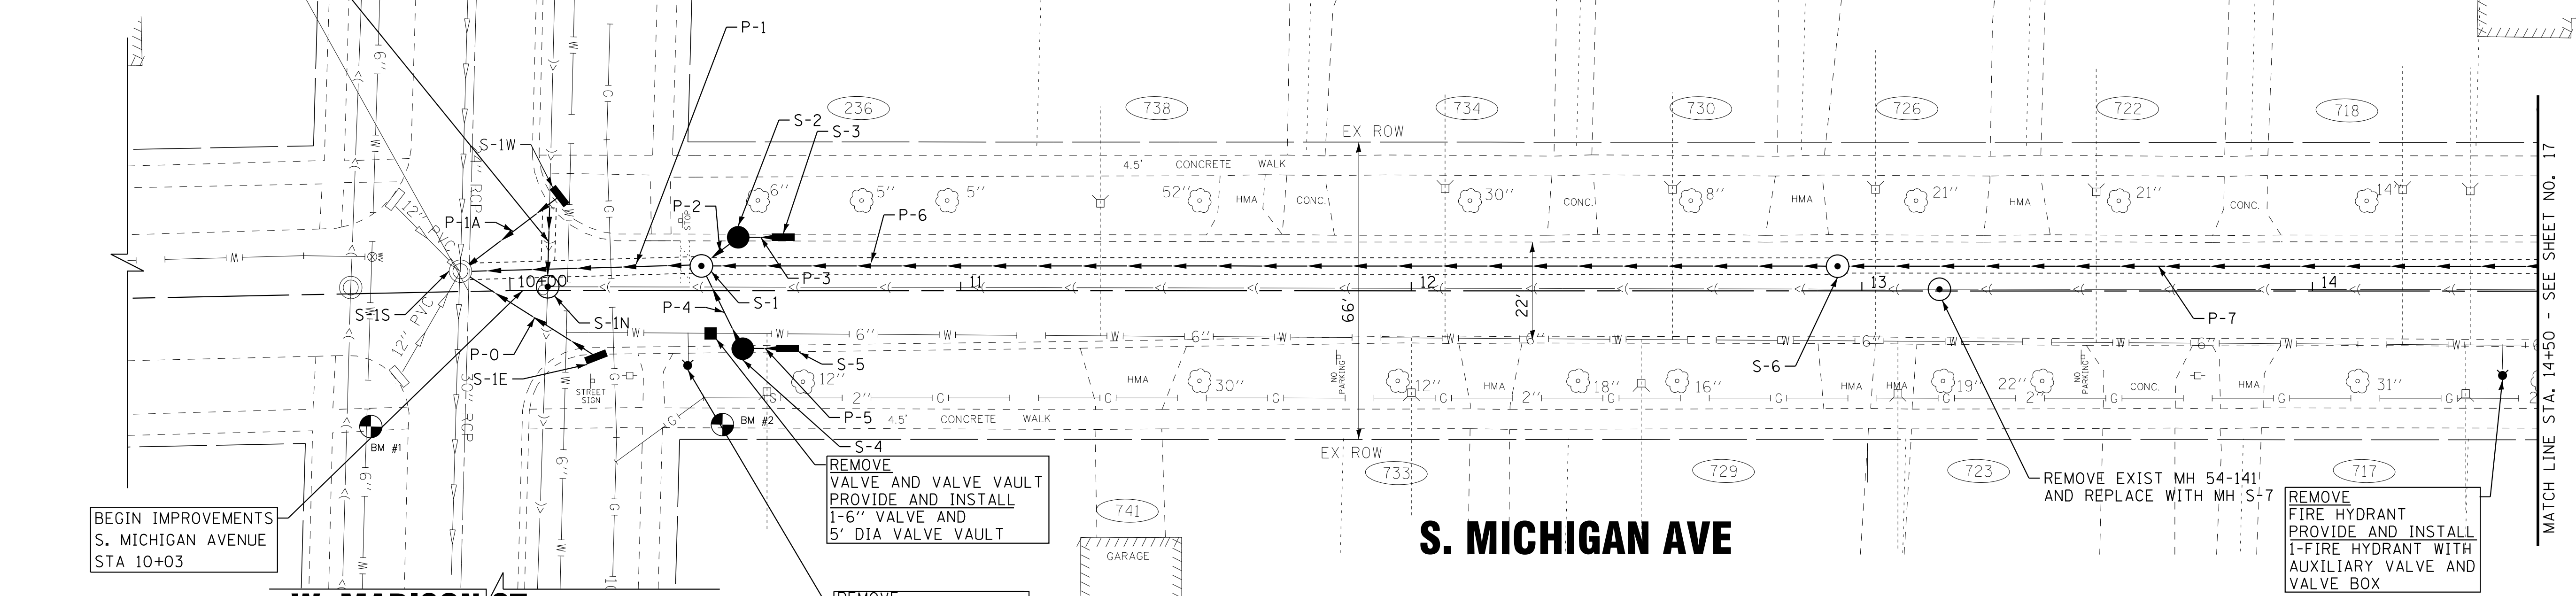

BEGIN IMPROVEMENTS  
S. MICHIGAN AVENUE  
STA 10+03

REMOVE  
VALVE AND VALVE VAULT  
PROVIDE AND INSTALL  
1-6" VALVE AND  
5' DIA VALVE VAULT

REMOVE  
FIRE HYDRANT  
PROVIDE AND INSTALL  
1-FIRE HYDRANT WITH  
AUXILIARY VALVE AND  
VALVE BOX

REMOVE EXIST MH 54-141  
AND REPLACE WITH MH S-7

REMOVE  
FIRE HYDRANT  
PROVIDE AND INSTALL  
1-FIRE HYDRANT WITH  
AUXILIARY VALVE AND  
VALVE BOX


MATCH LINE STA. 14+50 - SEE SHEET NO. 17

STORM PIPES

NO.	TYPE	TY	DIA (IN)	LENGTH (FT)	SLOPE	TBF (CU YD)
P-0	STORM SEWERS (WATER MAIN QUALITY)	2	12	33	2.52%	22.4
P-1A	STORM SEWERS (WATER MAIN QUALITY)	2	12	24	2.75%	7.9
P-1	STORM SEWER (WATER MAIN REQUIREMENTS) EQUIVALENT ROUND-SIZE	2	36	53	0.51%	160.1
P-2	STORM SEWERS, RUBBER GASKET, CLASS A	1	12	10	1.00%	2.6
P-3	STORM SEWERS, RUBBER GASKET, CLASS A	1	12	10	1.00%	2.4
P-4	STORM SEWERS (WATER MAIN QUALITY)	1	12	20	1.00%	4.7
P-5	STORM SEWERS, RUBBER GASKET, CLASS A	1	12	10	1.00%	2.4
P-6	STORM SEWERS, RUBBER GASKET, CLASS A	2	36	252	0.40%	529.2
P-7	STORM SEWERS, RUBBER GASKET, CLASS A	2	30	200	0.40%	362.2

STORM STRUCTURES

LABEL	STATION	OFFSET (FT)	TYPE	FRAME	ELEVATION	RIM/EOP	INVERTS
S-1S	9+89	4.5	LT EXISTING MANHOLE		703.52	RIM	EX 690.69 30° E, EX 690.69 24° W, 698.27 12° NE, EX 698.12 12° SW SE NW, 690.69 36° N
S-1E	10+21	13.0	RT INLET TYPE A	T-11 F&G	703.57	EOP	699.10 12° SW
S-1W	10+11	20.5	LT INLET TYPE A	T-11 F&G	703.22	EOP	699.78 12° SE
S-1N	10+08	1.0	LT SAN MANHOLES TYPE A, 4' DIA	TY 1 CL	703.56	RIM	EX 694.24 24° E, EX 694.24 10° S, EX 694.24 24° W, EX 694.24 15° N
S-1	10+42	5.5	LT MANHOLES TYPE A, 5' DIA (W/ RESTRICTOR)	TY 1 CL	703.77	RIM	690.96 36° S, 692.70 36° N, 700.43 12° NW, 700.33 12° NE
S-2	10+51	11.0	LT CATCH BASIN TYPE C	T-11 F&G	703.59	EOP	700.53 12° SE, 700.53 12° N
S-3	10+61	11.0	LT INLET TYPE A	T-11 F&G	703.64	EOP	700.63 12° S
S-4	10+52	12.0	RT CATCH BASIN TYPE C	T-11 F&G	703.57	EOP	700.53 12° SW, 700.53 12° N
S-5	10+62	12.0	RT INLET TYPE A	T-11 F&G	703.63	EOP	700.63 12° S
S-6	12+95	5.5	LT MANHOLES TYPE A, 5' DIA	TY 1 CL	704.55	RIM	693.71 36° S, 693.71 30° N
S-7	13+17	0.0	CL SAN MANHOLES TYPE A, 4' DIA	TY 1 CL	704.54	RIM	EX 697.11 15° S, EX 697.11 15° N

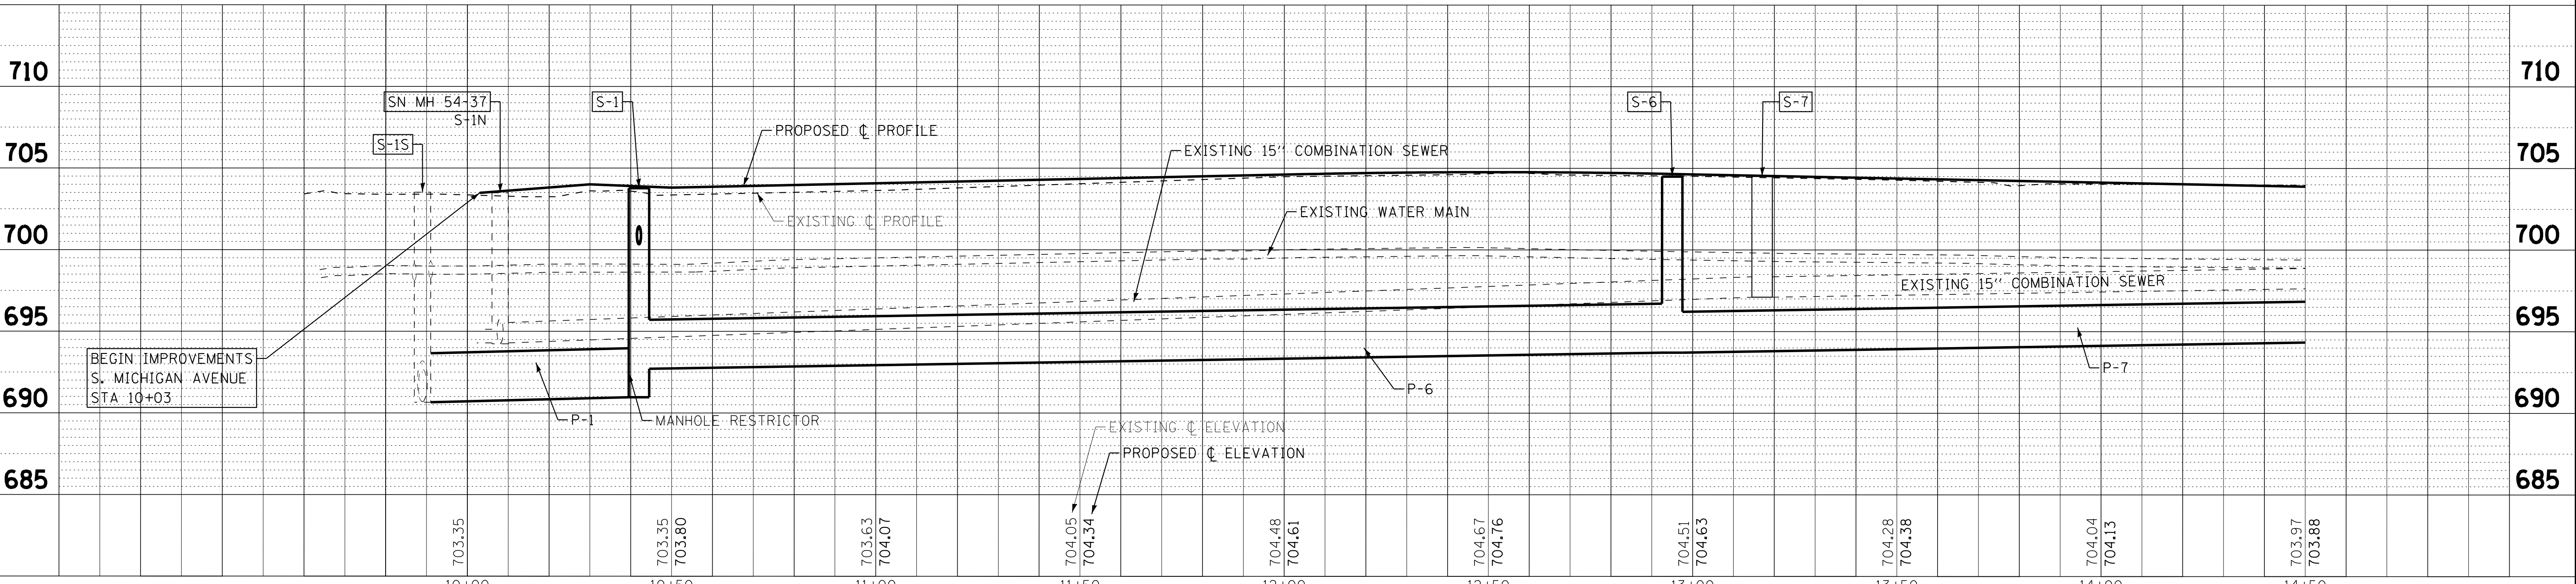

BEGIN IMPROVEMENTS  
S. MICHIGAN AVENUE  
STA 10+03

COPYRIGHT © 2016 BY BAXTER & WOODMAN, INC.  
 STATE OF ILLINOIS PROFESSIONAL ENGINEERING LICENSE NO. 194-001021 - EXPIRES 4/30/2017  
 PROJECT: VILPA3101-South Michigan Ave\cadd\Drawings\3101SHT-DUI.dgn  
 DATE: 12/9/2016 9:55:27 AM  
 DRAWN BY: JDM  
 CHECKED BY: TMS  
 DATE: 10-18-16



DESIGNED - JDM	REVISED - 04-07-16
DRAWN - MAC	REVISED - ADDENDUM 1 12-05-16
CHECKED - TMS	REVISED - ADDENDUM 2 12-09-16
DATE - 10-18-16	FILE - 13101SHT-DUI.dgn

VILLAGE OF VILLA PARK, ILLINOIS  
SOUTH MICHIGAN AVENUE

DRAINAGE AND UTILITIES

SCALE: H: 1"=20' V: 1"=5'  
STA. 9+91 TO STA. 14+50

F.A. RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
N/A	N/A	DUPAGE	39	16
FED. ROAD DIST. NO. 1 ILLINOIS FED. AID PROJECT			CONTRACT NO.	