



A Red Light Running (RLR) Photo Enforcement System was installed at the intersection of IL 83 and Riverside Drive on February 28, 2009, after finding limited success with other attempted measures to promote safer driving and improve compliance with traffic laws. As a condition of use, both Illinois law and the Illinois Department of Transportation require periodic statistical analyses / evaluations be conducted.

Specifically, the Illinois Compiled Statutes, 625 ILCS 5/11-208.6 Automated Traffic Law Enforcement System states:

(k-7) A municipality or county operating an automated traffic law enforcement system shall conduct a statistical analysis to assess the safety impact of each automated traffic law enforcement system at an intersection following installation of the system. The statistical analysis shall be based upon the best available crash traffic and other data, and shall cover a period of time before and after installation of the system sufficient to provide a statistically valid comparison of safety impact. The statistical analysis shall be consistent with professional judgment and acceptable industry practice. The statistical analysis also shall be consistent with the data required for valid comparisons of before and after conditions and shall be conducted within a reasonable period following the installation of the automated traffic law enforcement system. The statistical analysis required by this subsection (k-7) shall be made available to the public and shall be published on the website of the municipality or county. If the statistical analysis for the 36-month period following installation of the system indicates that there has been an increase in the rate of accidents at the approach to the intersection monitored by the system, the municipality or county shall undertake additional studies to determine the cause and severity of the accidents, and may take any action that it determines is necessary or appropriate to reduce the number or severity of the accidents at that intersection.

The Illinois Department of Transportation Safety Engineering Policy Memorandum, Safety 2-13, Automated Traffic Law Enforcement Systems: Red Light Running (RLR) Camera Enforcement Systems and Automated Railroad Grade Crossing (RGC) Enforcement Systems states:

Follow Up Evaluation

An Evaluation Report shall be prepared by the Permit Applicant one year after the installation and shall be prepared every three years thereafter. The Evaluation Report shall include the following:

- *Intersection location(s);*
- *Date of implementation;*
- *RLR Camera System manufacturer and contractor name;*
- *Crash data specific to RLR location(s) for the three (3) year period prior to and for the period post RLR Camera installation;*
- *An analysis of the crash data, including a summary of any increase in crash types;*
- *Signal timing and other settings before and after RLR Camera installation;*
- *Traffic volumes before and after RLR Camera System installation; and,*
- *Summary of adjudication experience and results.*


The following statistical analysis was performed through 2016.

Calendar year 2017 was not included, as the Illinois Department of Transportation (IDOT) has not yet completed collecting all data. The statistical analysis will be updated annually, as IDOT collected data becomes available for release.



IL 83 & Riverside Dr. Villa Park, IL

- RLR Photo Enforcement System monitors violations occurring on the southbound and eastbound approaches of the intersection
- RLR Photo Enforcement System installed: February 28, 2009
- Traffic signal timing strictly adheres to the guidelines for timing of clearances established by the Illinois Department of Transportation (IDOT), in accordance with the MUTCD standards. Neither the Vendor nor the Village has access to or influence over the establishment of signal timings. Both entities understand that tampering with these timings would be a safety violation with significant consequences.

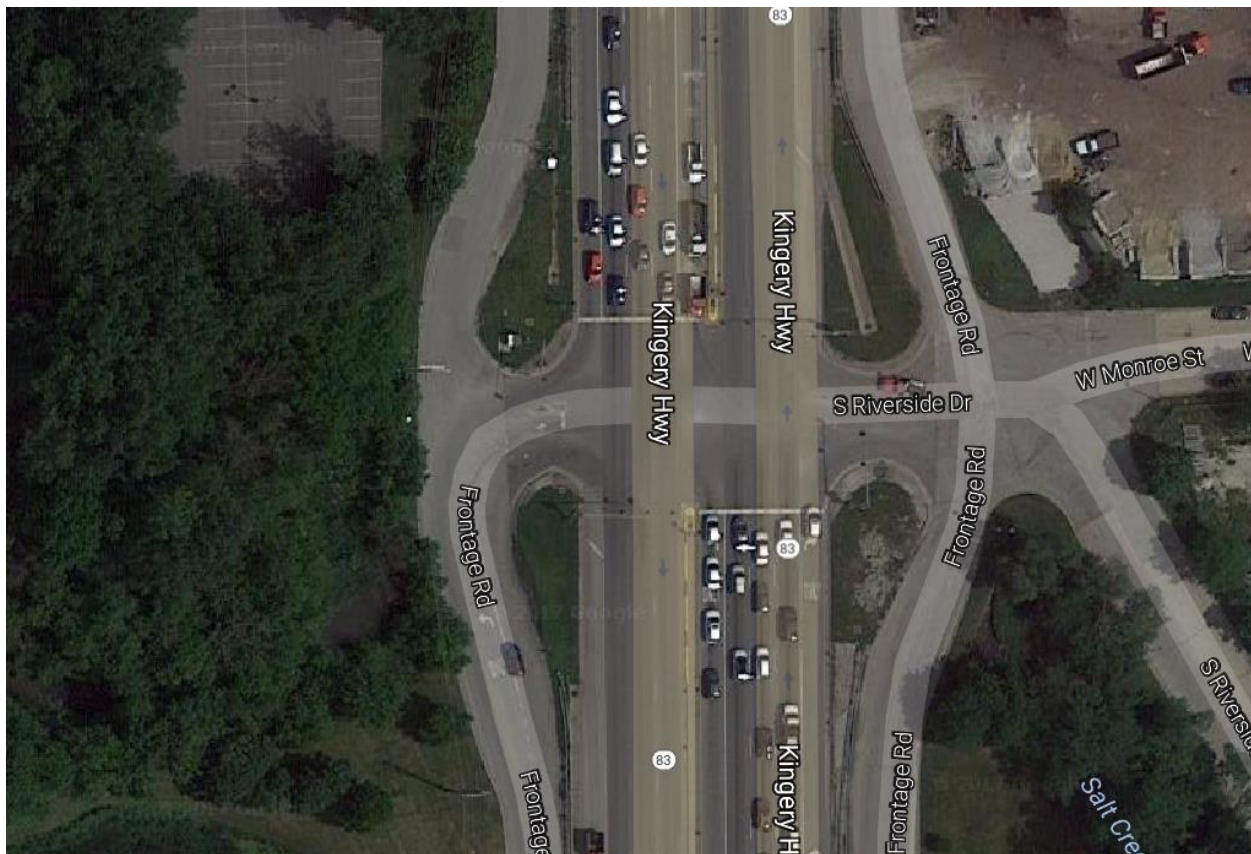



IL 83 & Riverside Dr. - Northbound Approach



IL 83 & Riverside Dr. - Southbound Approach






IL 83 & Riverside Dr. - Eastbound Approach



IL 83 & Riverside Dr. - Westbound Approach

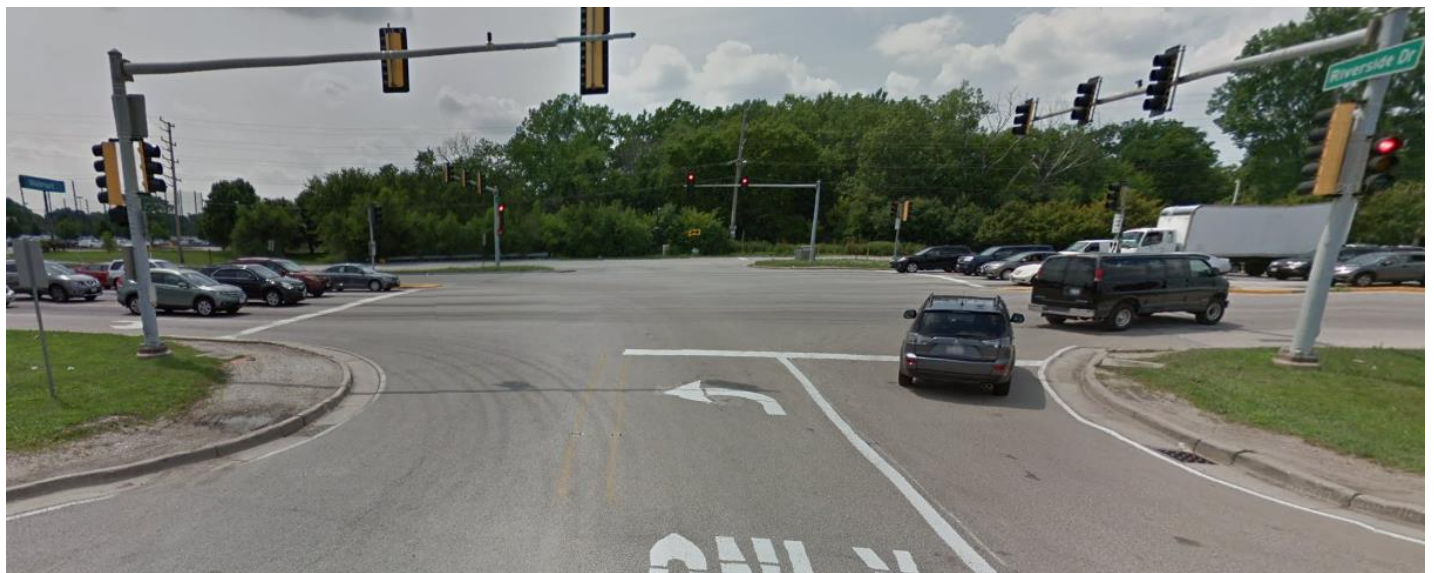




Average Daily Traffic

Data was obtained from the Illinois Department of Transportation's website www.gettingaroundillinois.com.

IL 83 & Riverside Dr. (Northbound/Southbound)

- 68,000 (2007)
- 72,200 (2009)
- 63,500 (2011)
- 68,100 (2013)

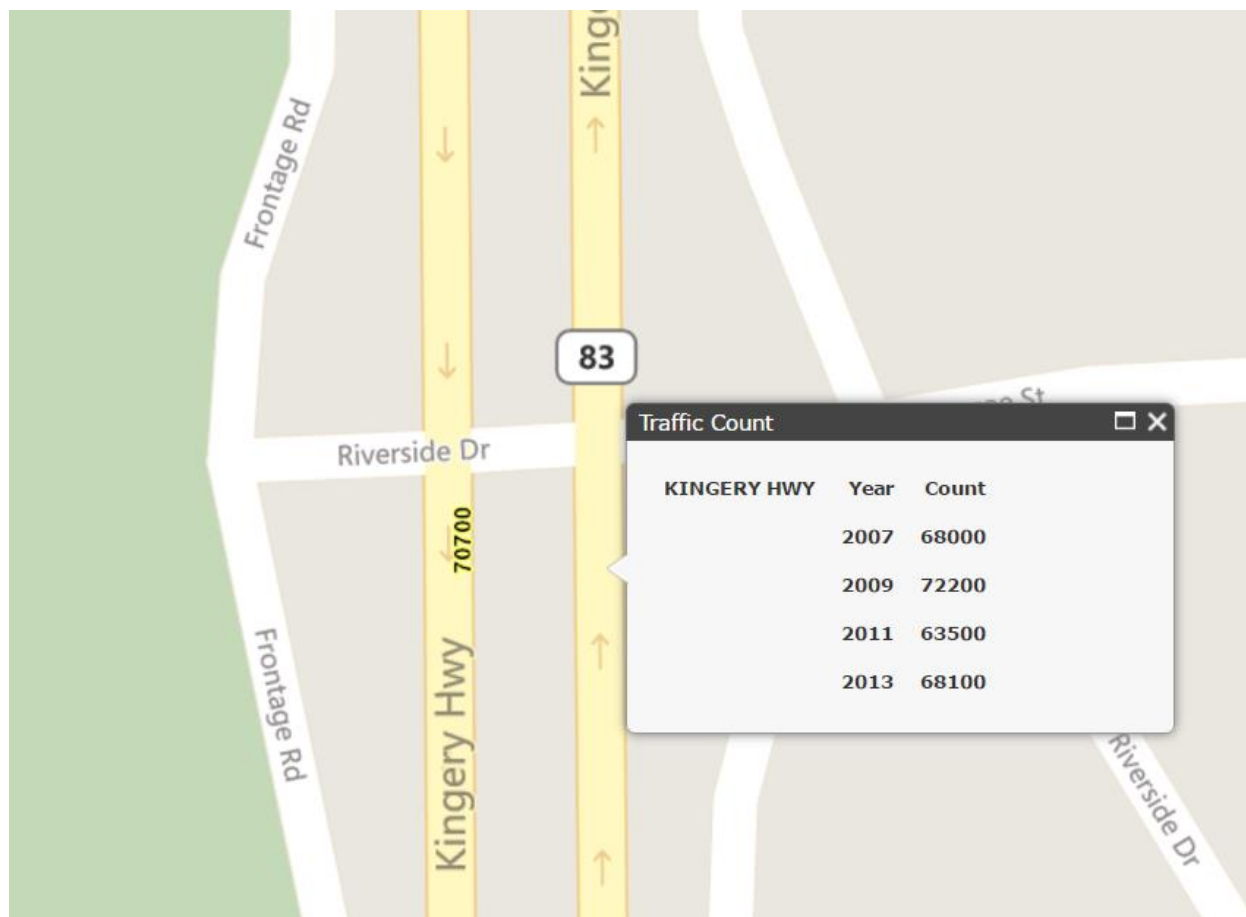




Average Daily Traffic Cont'd

Data was obtained from the Illinois Department of Transportation's website
www.gettingaroundillinois.com.

IL 83 & Riverside Dr. (Eastbound/Westbound)

- No historical traffic data available

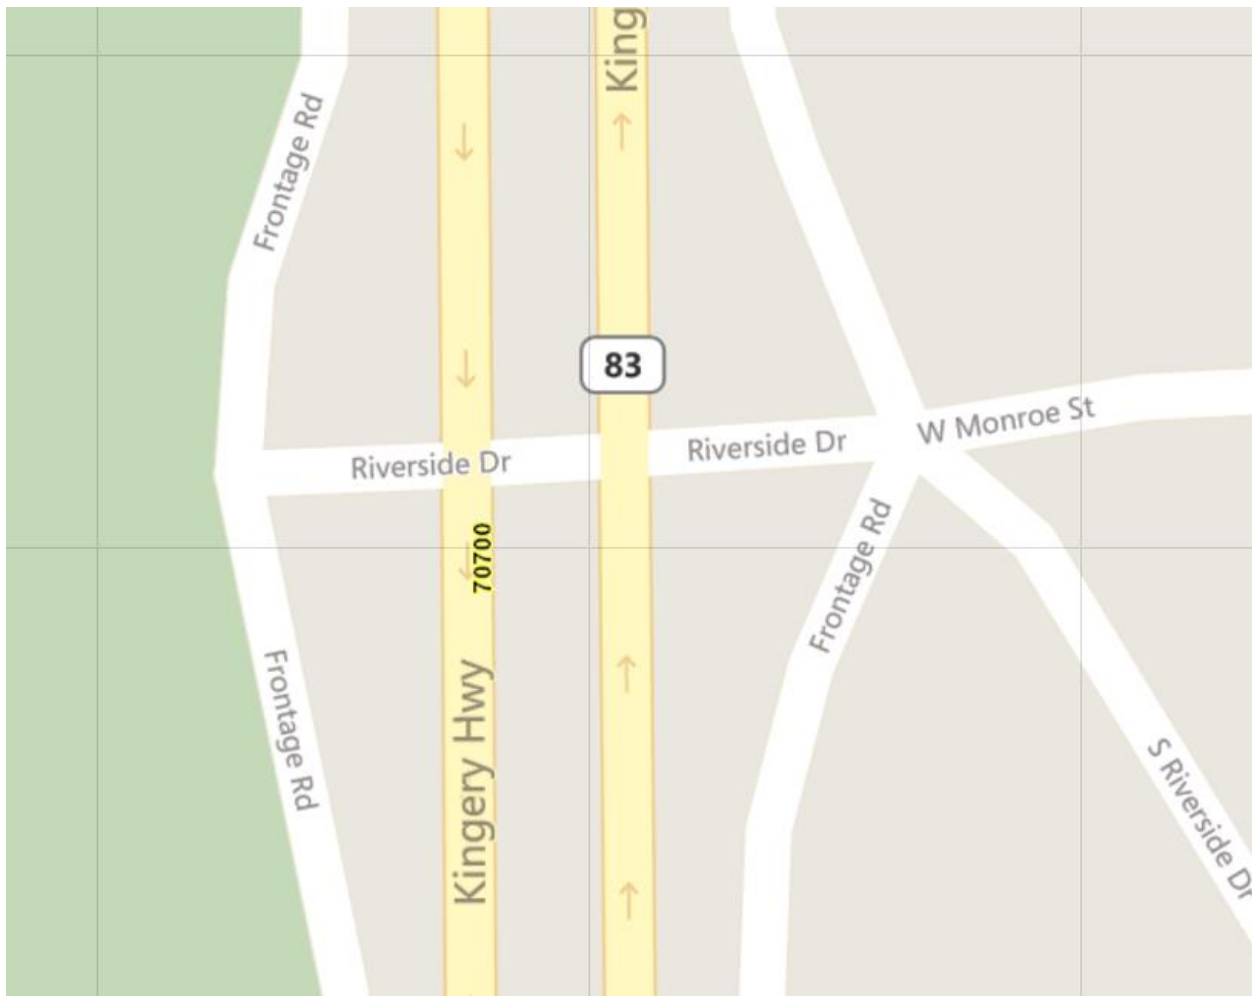



Adjudication Experience

RLR camera violations are contested and adjudicated through an administrative hearing conducted each month. Adjudication data for the Village’s Automated Enforcement Program is shown below in Table 1.

VILLAGE OF VILLA PARK ADJUDICATION FOR AUTOMATED PHOTO ENFORCEMENT PROGRAM*		
YEAR /TOTALS	LIABLE	NOT LIABLE
2009	1,203	26
2010	730	41
2011	499	39
2012	460	59
2013	633	35
2014	307	29
2015	507	60
2016	458	51
2017	422	48
2018*	217	48
TOTAL:	5,436	436

*Adjudication totals include contested violations for entire program (all RLR cameras).

**2018 totals through August 2018.

Table 1

The high quality video footage and photographic evidence produced by the enforcement system is a contributing factor in a majority of the contested RLR violations being upheld by the Hearing Officer. The police officers assigned to review and approve/reject potential violations are vigilant in applying the same officer discretion and criteria they would if issuing an in-person citation, resulting in only highly prosecutable violations being mailed out.



Crash History and Analysis

- Table 2 includes crash data obtained from the Illinois Department of Transportation, detailing angle, turning, rear-end, and other type crashes occurring at the intersection pre/post RLR Photo Enforcement System installation.

ALL INTERSECTION APPROACHES

	Crashes								
	Rear-End (% of Total)		Angle (% of Total)		Turning (% of Total)		Other (% of Total)		Total
2006	9	47.4%	1	05.3%	4	21.0%	5	26.3%	19
2007	11	57.9%	0	00.0%	6	31.6%	2	10.5%	19
2008	18	75.0%	0	00.0%	5	20.8%	1	04.2%	24
Total	38	61.3%	1	01.6%	15	24.2%	8	12.9%	62
2006-2008 Average	12.7		0.3		5.0		2.7		20.7

RLR Camera Installation 02/28/09									
2009	18	94.7%	0	00.0%	1	05.3%	0	00.0%	19
2010	6	54.5%	0	00.0%	4	36.4%	1	09.1%	11
2011	12	66.7%	0	00.0%	3	16.7%	3	16.7%	18
2012	12	85.7%	0	00.0%	1	07.1%	1	07.1%	14
2013	7	50.0%	2	14.3%	3	21.4%	2	14.3%	14
2014	12	70.6%	0	00.0%	3	17.6%	2	11.8%	17
2015	15	65.2%	1	04.3%	4	17.4%	3	13.0%	23
2016	8	80.0%	0	00.0%	2	20.0%	0	00.0%	10
Total	72	67.3%	3	02.8%	20	18.7%	12	11.2%	107
2010-2016 Average	10.3		0.4		2.9		1.7		15.3

- Other indicates the following: Pedestrian, Pedal Cyclist, Fixed Object, Sideswipe, Head-On and Unknown

Table 2

DISCLAIMER: The motor vehicle crash data referenced herein was provided by the Illinois Department of Transportation, based upon information derived from multiple sources. Any conclusions drawn from analysis of the aforementioned data are the sole responsibility of the data recipient(s). Additionally, for coding years 2015 to present, the Bureau of Data Collection uses the exact latitude/longitude supplied by the investigating law enforcement agency to locate crashes. Therefore, location data may vary in prior years, since the data prior to 2015 was physically located by bureau personnel. Given the subjective nature of the reporting process, the modifications in the incident locating protocols and the changes to the crash reporting thresholds effective 2009, the Village of Villa Park acknowledges the potential for discrepancies in the final conclusions drawn.



Crash History and Analysis (continued)

- Table 3 includes crash data obtained from the Illinois Department of Transportation, detailing angle, turning, rear-end, and other-type crashes occurring at the intersection on the southbound and eastbound approaches only, pre/post RLR Photo Enforcement System installation.

**SOUTHBOUND AND EASTBOUND APPROACHES ONLY
 (PHOTO ENFORCED APPROACHES)**

	Crashes								
	Rear-End (% of Total)		Angle (% of Total)		Turning (% of Total)		Other (% of Total)		Total
2006	6	60.0%	1	10.0%	2	20.0%	1	10.0%	10
2007	9	60.0%	0	00.0%	5	33.3%	1	06.7%	15
2008	7	53.8%	0	00.0%	5	38.5%	1	07.7%	13
Total	22	57.9%	1	02.6%	12	31.6%	3	07.9%	38
2006-2008 Average	7.3		0.3		4.0		1.0		12.7

RLR Camera Installation 02/28/09									
2009	9	90.0%	0	00.0%	1	10.0%	0	00.0%	10
2010	1	25.0%	0	00.0%	2	50.0%	1	25.0%	4
2011	5	71.4%	0	00.0%	2	28.6%	0	00.0%	7
2012	8	80.0%	0	00.0%	1	10.0%	1	10.0%	10
2013	3	42.8%	1	14.3%	2	28.6%	1	14.3%	7
2014	4	57.1%	0	00.0%	2	28.6%	1	14.3%	7
2015	9	52.9%	1	05.9%	4	23.5%	3	17.6%	17
2016	2	50.0%	0	00.0%	2	50.0%	0	00.0%	4
Total	32	57.1%	2	03.6%	15	26.8%	7	12.5%	56
2010-2016 Average	4.6		0.3		2.1		1.0		8.0

- Other indicates the following: Pedestrian, Pedal Cyclist, Fixed Object, Sideswipe, Head-On and Unknown

Table 3

DISCLAIMER: The motor vehicle crash data referenced herein was provided by the Illinois Department of Transportation, based upon information derived from multiple sources. Any conclusions drawn from analysis of the aforementioned data are the sole responsibility of the data recipient(s). Additionally, for coding years 2015 to present, the Bureau of Data Collection uses the exact latitude/longitude supplied by the investigating law enforcement agency to locate crashes. Therefore, location data may vary in prior years, since the data prior to 2015 was physically located by bureau personnel. Given the subjective nature of the reporting process, the modifications in the incident locating protocols and the changes to the crash reporting thresholds effective 2009, the Village of Villa Park acknowledges the potential for discrepancies in the final conclusions drawn.



Comparison of annual averages shows a 26.1% decrease in the total number of crashes at the intersection for all approaches and a 37.0% decrease on the southbound and eastbound (photo enforced) approaches post-camera installation.

The US Department of Transportation Project Development and Design Manual states that turning, angle or head-on crashes have a number of probable crash causes, to include:

- Large volumes of left /right turns
- Large total intersection volume
- Excessive speed on approaches
- Inadequate traffic control devices
- Poor visibility of signals

While red light cameras cannot truly decrease the volume of cars entering the intersection, speed and proximity of vehicles entering an intersection or the amount of turning traffic volume, red light cameras and red light camera photo enforcement warning signs have the ability to reduce traffic crashes and improve compliance with traffic control devices.

Analysis of all available data indicates the Village's RLR Photo Enforcement Program has made a significant impact on traffic safety at this intersection and that continued enforcement will be beneficial in the years to come.